

Application of Double Natural Transform to One-Dimensional Heat Equations

Ravi Kumar Jain^{1*} and Alok Bhargava¹

¹Department of Mathematics and Statistics, Manipal University Jaipur, Jaipur (India).

ABSTRACT

This paper presents the application of double Natural transform method to solve one-dimensional heat equations $\frac{\partial U(x,t)}{\partial t} = \frac{\partial^2 U(x,t)}{\partial x^2} + f(x,t)$ under the given conditions. The Double Natural Transform (DNT) method is a general method thus provide a wider domain of the application and it can be observed by the work of Eshag [6] where the obtained results are comparable with the solutions from the literature with the help of double Laplace and double Sumudu transform methods. The results in this study were calculated numerically by using suitable values of parameters and interpreted graphically.

Keywords: Double Laplace Transform, Double Natural Transform, Double Sumudu Transform, Natural Transform, One-Dimensional Heat Equation.

1. INTRODUCTION

Partial differential equations and their applications are very useful in various branches of engineering and basic sciences. Many researchers have done their work on the solutions of various types of partial differential equations with initial as well as boundary conditions by using different methods. The list of methods may include numerical methods like finite difference method, finite element method, finite volume method etc., analytical methods like separation of variables method, method of characteristics etc., calculus of variations method, charpit method, integral transform methods like Laplace Transform, Fourier Transform, Mellin Transform, Hankel Transform etc.

Heat transfer is the process of transferring heat energy from one point to another. In this process, heat flows from the point of higher temperature to the point of lower temperature. The governing equation of this heat transfer is known as the heat equation, this equation is a parabolic partial differential equation that describes the distribution of heat (or variation in temperature) in a given region over time.

In this paper, we have solved one-dimensional heat equations by using Double Natural Transform (DNT) method and exhibit those numerically and graphically by using Origin Lab. These results are comparable with the results that have been obtained earlier in the literature by double Laplace and double Sumudu transform method [5, 6, 9].

The Natural transform was developed and studied by Khan and Khan [8] and some of its properties and applications were investigated by Al-Omari [1], Belgacem and Silambarasan [2, 3, 4] and Mana and Omranb [10]. The Natural transform usually deals with continuous and continuously differentiable functions, if the function is not differentiable then the Natural transform fails to apply, similarly as Laplace transform [11] and Sumudu transform [13]. The

*Corresponding Author: alok.bhargava@jaipur.manipal.edu

main purpose of this work is to generalize the definition of a single Natural transform to double Natural transform and achieve its main properties, in order to solve the one-dimensional heat equation.

The Natural transform [8] of a function $f(t)$ is given by:

$$N[f(t)] = R(s, u) = \int_0^{\infty} e^{-st} f(ut) dt = \frac{1}{u} \int_0^{\infty} e^{-\frac{s}{u}t} f(t) dt \quad (1.1)$$

Remark 1.1: if we take $u = 1$ and $s = 1$, then the Natural transform reduces in Laplace Transform [11] and Sumudu transform [13] respectively.

The Double Natural Transform (DNT) [10] of a function $f(x, y) ; x, y \in R_+$ is defined as:

$$\begin{aligned} N_+^2[f(x, y)] &= R_+^2[(s, p); (u, v)] = \int_0^{\infty} \int_0^{\infty} e^{-(sx+py)} f(ux, vy) dx dy = \\ &= \frac{1}{uv} \int_0^{\infty} \int_0^{\infty} e^{-\left(\frac{sx}{u} + \frac{py}{v}\right)} f(x, y) dx dy \end{aligned} \quad (1.2)$$

Remark 1.2: If we take $u = v = 1$ in (1.2), we get Double Laplace Transform [7] as:

$$L^2[f(x, y)] = F^2(s, p) = \int_0^{\infty} \int_0^{\infty} e^{-(sx+py)} f(x, y) dx dy ; x, y \in R_+ \quad (1.3)$$

Remark 1.3: If we take $s = p = 1$ in (1.2), we get Double Sumudu transform [12] as:

$$S^2\{f(x, y)\} = G^2(u, v) = \frac{1}{uv} \int_0^{\infty} \int_0^{\infty} e^{-\left(\frac{x}{u} + \frac{y}{v}\right)} f(x, y) dx dy ; x, y \in R_+ \quad (1.4)$$

2. Main Results

In this section, we assume that the inverse double Natural transform exists for the functions that are used in the problems, mentioned in the following part of this section. Then we have applied the double Natural transform (DNT) to find the solution of the one-dimensional heat equation of type $\frac{\partial U(x, t)}{\partial t} = \frac{\partial^2 U(x, t)}{\partial x^2} + f(x, t)$ with initial and boundary conditions. Such problems are very common in mechanical engineering and thermal engineering, out of those some problems are taken here for the said purpose.

Problem 2.1 Let us consider the heat equation (one can refer [6]) given by:

$$\frac{\partial U(x, t)}{\partial t} = \frac{\partial^2 U(x, t)}{\partial x^2}, \quad t > 0 \quad (2.1)$$

with conditions

$$U(0, t) = 0, \quad U(x, 0) = \sin x, \quad \frac{\partial U(0, t)}{\partial x} = e^{-t} \quad (2.2)$$

Solution: By taking the DNT of equation (2.1) from both the sides, we get

$$\frac{p}{v} N_+^2\{U(x, t)\} - \frac{N_+^2\{U(x, 0)\}}{v} = \frac{s^2}{u^2} N_+^2\{U(x, t)\} - \frac{s}{u^2} N_+^2\{U(0, t)\} - \frac{1}{u} N_+^2\left\{\frac{\partial U(0, t)}{\partial x}\right\} \quad (2.3)$$

by taking Natural transform on initial conditions (2.2) gives

$$N\{U(0, t)\} = 0, N\{U(x, 0)\} = \frac{u}{s^2 + u^2}, N\left\{\frac{\partial U(0, t)}{\partial x}\right\} = \frac{1}{p + v} \quad (2.4)$$

from (2.4) and (2.3) we get

$$\left[\frac{p}{v} - \frac{s^2}{u^2}\right] [N_+^2\{U(x, t)\}] = \frac{u}{v(s^2 + u^2)} - \frac{1}{u(p + v)} \quad (2.5)$$

$$[N_+^2\{U(x, t)\}] = \frac{u}{(p + v)(s^2 + u^2)}$$

Now by taking inverse double natural transform we get the solution of (2.1) as

$$U(x, t) = e^{-t} \sin x \quad (2.6)$$

The graphs of the solution of the heat equation (2.1) are presented as Figure 2.1 and Figure 2.2, in which the t and x were fix one by one to obtain the numerical results shown in Table 2.1 and Table 2.2. The range of x and t are $0 \leq x \leq 7.5$ and $0 \leq t \leq 3$ respectively.

Table 2.1 Values of $U(x, t)$ for fixed t

Fix $t = 0$		Fix $t = 1$		Fix $t = 2$		Fix $t = 3$	
(x, t)	$U(x, t)$	(x, t)	$U(x, t)$	(x, t)	$U(x, t)$	(x, t)	$U(x, t)$
(0,0)	0	(0,1)	0	(0,2)	0	(0,3)	0
(0.5,0)	.4794	(0.5,1)	.1764	(0.5,2)	.0649	(0.5,3)	.0239
(1,0)	.8415	(1,1)	.3096	(1,2)	.1139	(1,3)	.0419
(1.5,0)	.9975	(1.5,1)	.3670	(1.5,2)	.1350	(1.5,3)	.0497
(2,0)	.9093	(2,1)	.3345	(2,2)	.12306	(2,3)	.0453
(2.5,0)	.5985	(2.5,1)	.2202	(2.5,2)	.0810	(2.5,3)	.0298
(3,0)	.1411	(3,1)	.05192	(3,2)	.0191	(3,3)	.0070
(3.5,0)	-.3508	(3.5,1)	-.1290	(3.5,2)	-.0475	(3.5,3)	-.0175
(4,0)	-.7568	(4,1)	-.3784	(4,2)	-.1024	(4,3)	-.0377
(4.5,0)	-.9775	(4.5,1)	-.3596	(4.5,2)	-.1323	(4.5,3)	-.0487
(5,0)	-.9589	(5,1)	-.3528	(5,2)	-.1298	(5,3)	-.0478
(5.5,0)	-.7055	(5.5,1)	-.2596	(5.5,2)	-.0955	(5.5,3)	-.0351
(6,0)	-.2794	(6,1)	-.1028	(6,2)	-.0378	(6,3)	-.0139
(6.5,0)	.2151	(6.5,1)	.0791	(6.5,2)	.0291	(6.5,3)	.0107
(7,0)	.6570	(7,1)	.2417	(7,2)	.08891	(7,3)	.0327
(7.5,0)	.938	(7.5,1)	.3451	(7.5,2)	.1269	(7.5,3)	.0467

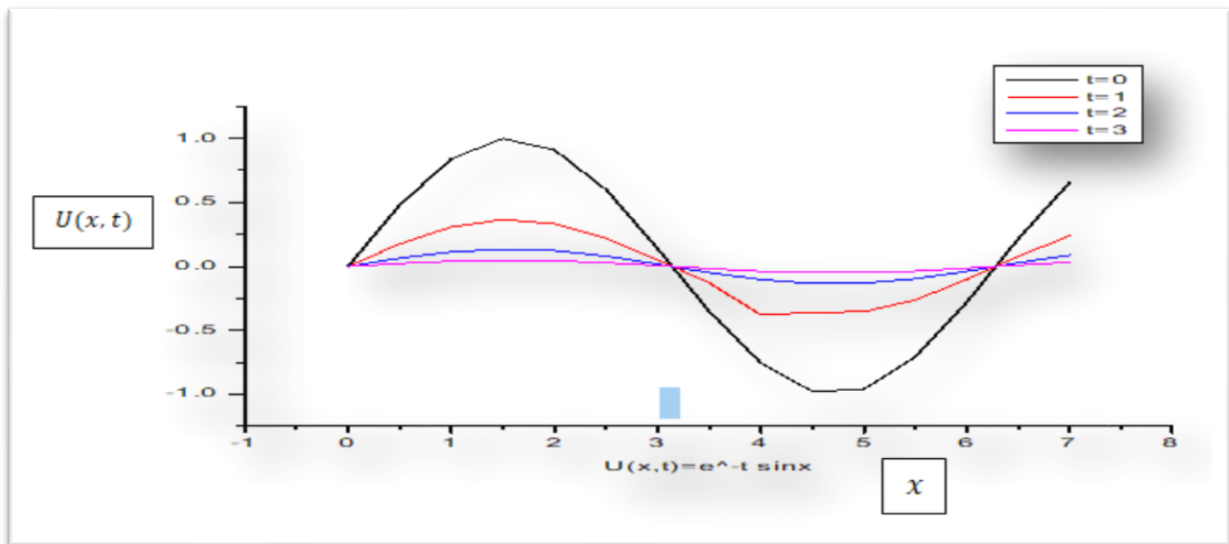


Figure 2.1. Graphical Interpretation of $U(x, t)$ for fixed t .

Discussion: By observing the numerical values in Table 2.1 and the Figure 2.1, that, for fix values of t , the heat flow moves like a sine wave and as the time passes, the amplitude of the waveform flow reduced gradually and moving towards the cooldown situation.

Table 2.2 Values of $U(x, t)$ for fixed x

Fix $x = 0$		Fix $x = 1.5$		Fix $x = 3$		Fix $x = 4.5$		Fix $x = 6$		Fix $x = 7.5$	
(x, t)	$U(x, t)$	(x, t)	$U(x, t)$	(x, t)	$U(x, t)$	(x, t)	$U(x, t)$	(x, t)	$U(x, t)$	(x, t)	$U(x, t)$
(0,0)	0	(1.5,0)	.09975	(3,0)	.1411	(4.5,0)	-.9775	(6,0)	-.2794	(7.5,0)	.9380
(0,1)	0	(1.5,1)	.3670	(3,1)	.0519	(4.5,1)	-.3596	(6,1)	-.1028	(7.5,1)	.3451
(0,2)	0	(1.5,2)	.13500	(3,2)	.0191	(4.5,2)	-.1323	(6,2)	-.03781	(7.5,2)	.1269
(0,3)	0	(1.5,3)	.04966	(3,3)	.0070	(4.5,3)	-.0487	(6,3)	-.0139	(7.5,3)	.0467
(0,4)	0	(1.5,4)	.01827	(3,4)	.0026	(4.5,4)	-.01790	(6,4)	-.0051	(7.5,4)	.0171
(0,5)	0	(1.5,5)	.00672	(3,5)	.00095	(4.5,5)	-.0066	(6,5)	-.0019	(7.5,5)	.0063
(0,6)	0	(1.5,6)	.0025	(3,6)	.00035	(4.5,6)	-.0024	(6,6)	-.0007	(7.5,6)	.0023

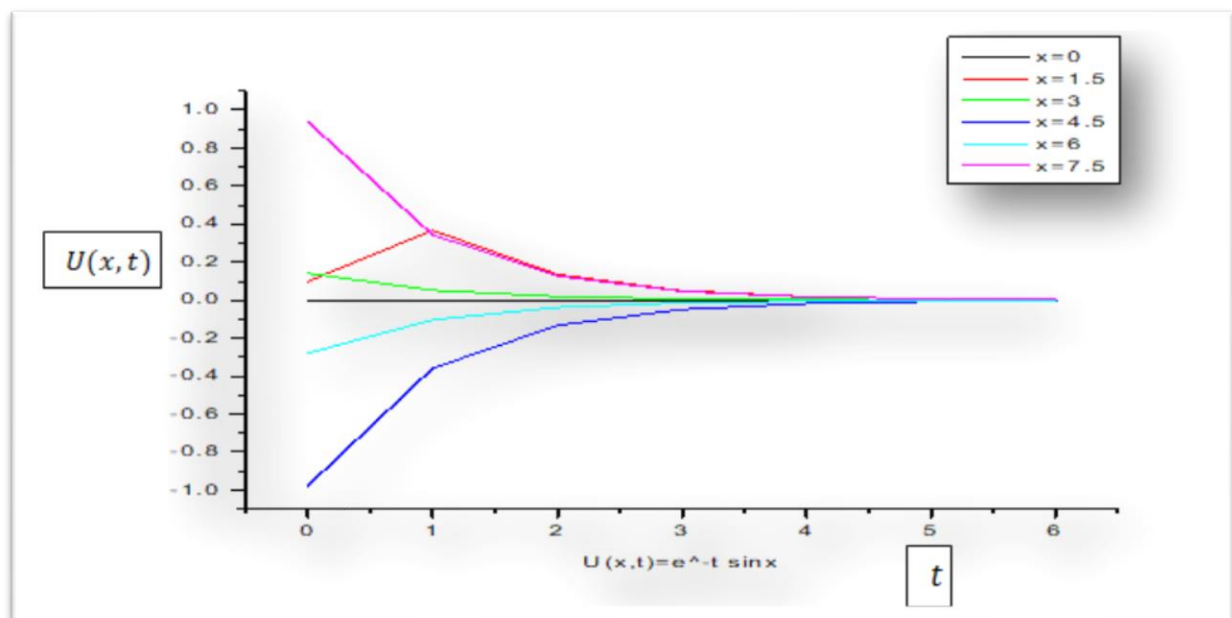


Figure 2.2: Graphical Interpretation of $U(x, t)$ for fixed x .

Discussion: By observing the numerical values in Table 2.2 and Figure 2.2, for fix values of x , the heat flow moves like the exponential wave and moving towards the cooldown situation as time passes.

Problem 2.2 Let us consider the heat equation

$$\frac{\partial U(x, t)}{\partial t} = \frac{\partial^2 U(x, t)}{\partial x^2} + \sin x, \quad t > 0 \tag{2.7}$$

With conditions

$$U(0, t) = e^{-t}, \quad U(x, 0) = \cos x \quad \text{and} \quad \frac{\partial U(0, t)}{\partial x} = 1 - e^{-t} \tag{2.8}$$

Solution: Applying DNT on the equation (2.7) in both the sides, we get

$$\begin{aligned} \frac{p}{v} N_+^2\{U(x, t)\} - \frac{1}{v} N_+^2\{U(x, 0)\} \\ = \frac{s^2}{u^2} N_+^2\{U(x, t)\} - \frac{s}{u^2} N_+^2\{U(0, t)\} - \frac{1}{u} N_+^2\left\{\frac{\partial U(0, t)}{\partial x}\right\} + \frac{u}{p(s^2 + u^2)} \end{aligned} \tag{2.9}$$

Also by taking Natural transform on initial conditions (2.8) gives

$$N[U(0, t)] = \frac{1}{p + v}, \quad N[U(x, 0)] = \frac{s}{s^2 + u^2}, \quad N\left[\frac{\partial u(0, t)}{\partial x}\right] = \frac{1}{p} - \frac{1}{p + v} \tag{2.10}$$

Substitute all these values in (2.9) we get

$$\begin{aligned} \left[\frac{p}{v} - \frac{s^2}{u^2}\right] [N_+^2\{U(x, t)\}] &= \frac{s}{v(s^2 + u^2)} - \frac{s}{u^2(p + v)} - \frac{1}{u} \left(\frac{1}{p} - \frac{1}{p + v}\right) + \frac{u}{p(s^2 + u^2)} \\ [N_+^2\{U(x, t)\}] &= \frac{s}{(p + v)(s^2 + u^2)} + \frac{u}{p(s^2 + u^2)} \cdot \frac{v}{(p + v)} \end{aligned} \tag{2.11}$$

Now by taking inverse double natural transform we get the solution of (2.7) as

$$U(x, t) = e^{-t} \cos x + \sin x (1 - e^{-t}) \tag{2.12}$$

The graphs of the solution of the heat equation (2.7) are presented as Figure 2.3 and Figure 2.4, where t and x were fixed one by one respectively to obtain the numerical results as shown in Table 2.3 and Table 2.4. The range of x and t are $0 \leq x \leq 7.5$ and $0 \leq t \leq 3$ respectively.

Table 2.3 Values of $U(x,t)$ for fixed t

Fix $t = 0$		Fix $t = 1$		Fix $t = 2$		Fix $t = 3$	
(x, t)	$U(x, t)$	(x, t)	$U(x, t)$	(x, t)	$U(x, t)$	(x, t)	$U(x, t)$
(0,0)	1	(0,1)	.3679	(0,2)	.1353	(0,3)	.0498
(0.5,0)	.8776	(0.5,1)	.6259	(0.5,2)	.5333	(0.5,3)	.4992
(1,0)	.54030	(1,1)	.7307	(1,2)	.8685	(1,3)	.8265
(1.5,0)	.07074	(1.5,1)	.6566	(1.5,2)	.8721	(1.5,3)	.95135
(2, 0)	-.4161	(2, 1)	.4217	(2, 2)	.7299	(2, 3)	.8433
(2.5, 0)	-.8011	(2.5, 1)	.0836	(2.5,2)	.4091	(2.5,3)	.5288
(3, 0)	-.9900	(3, 1)	-.275	(3, 2)	-.012	(3, 3)	.0848
(3.5, 0)	-.9365	(3.5, 1)	-.5662	(3.5,2)	-.4300	(3.5,3)	-.37994
(4, 0)	-.6536	(4, 1)	-.7189	(4, 2)	-.7428	(4, 3)	-.7517

(4.5, 0)	-.2108	(4.5, 1)	-.6955	(4.5, 2)	-.8738	(4.5, 3)	-.9394
(5, 0)	.2837	(5, 1)	-.50180	(5, 2)	-.7908	(5, 3)	-.8971
(5.5, 0)	.7087	(5.5, 1)	-.1853	(5.5, 2)	-.5141	(5.5, 3)	-.6351
(6, 0)	.96017	(6, 1)	.1766	(6, 2)	-.1117	(6, 3)	-.2177
(6.5, 0)	.9766	(6.5, 1)	.4952	(6.5, 2)	.3182	(6.5, 3)	.2530
(7, 0)	.7539	(7, 1)	.6926	(7, 2)	.67010	(7, 3)	.6618
(7.5, 0)	.3466	(7.5, 1)	.7204	(7.5, 2)	.85797	(7.5, 3)	.9086

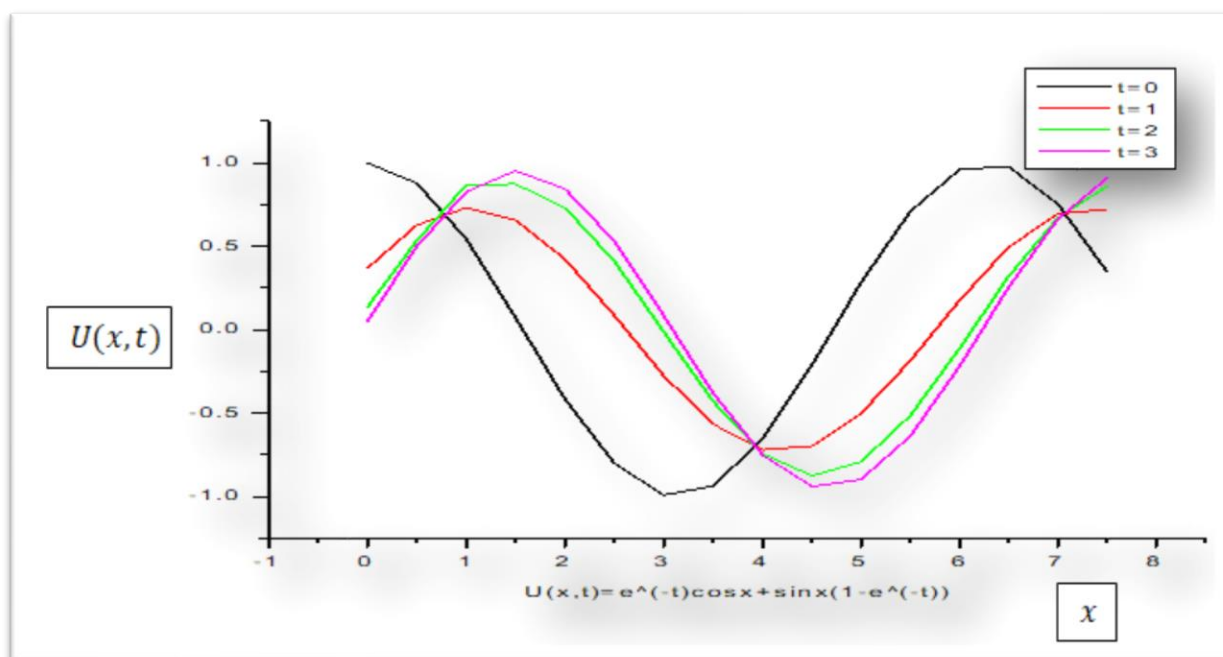


Figure 2.3. Graphical Interpretation of $U(x, t)$ for fixed t .

Discussion: By observing the numerical values in Table 2.3 and Figure 2.3, for fix values of t , the heat flow moves like a mixture of sine and cosine wave and overlaps at a point near to $x = 1, 4, 7$ as the time passes.

Table 2.4 Values of $U(x, t)$ for fixed x

Fix $x = 0$		Fix $x = 1.5$		Fix $x = 3$		Fix $x = 4.5$		Fix $x = 6$		Fix $x = 7.5$	
(x, t)	$U(x, t)$	(x, t)	$U(x, t)$	(x, t)	$U(x, t)$	(x, t)	$U(x, t)$	(x, t)	$U(x, t)$	(x, t)	$U(x, t)$
(0,0)	1	(1.5,0)	.07074	(3,0)	-.99	(4.5,0)	-.2108	(6,0)	.9601	(7.5,0)	.3466
(0,1)	.3679	(1.5,1)	.6566	(3,1)	-.275	(4.5,1)	-.6955	(6,1)	.1766	(7.5,1)	.7204
(0,2)	.1353	(1.5,2)	.8721	(3,2)	-.012	(4.5,2)	-.8738	(6,2)	-.1117	(7.5,2)	.858
(0,3)	.0498	(1.5,3)	.95135	(3,3)	.0848	(4.5,3)	-.9394	(6,3)	-.2177	(7.5,3)	.909
(0,4)	.0183	(1.5,4)	.9805	(3,4)	.1204	(4.5,4)	-.9635	(6,4)	-.2567	(7.5,4)	.927
(0,5)	.0067	(1.5,5)	.9913	(3,5)	.1335	(4.5,5)	-.9724	(6,5)	-.2711	(7.5,5)	.934
(0,6)	.0025	(1.5,6)	.9952	(3,6)	.1383	(4.5,6)	-.9756	(6,6)	-.2763	(7.5,6)	.937

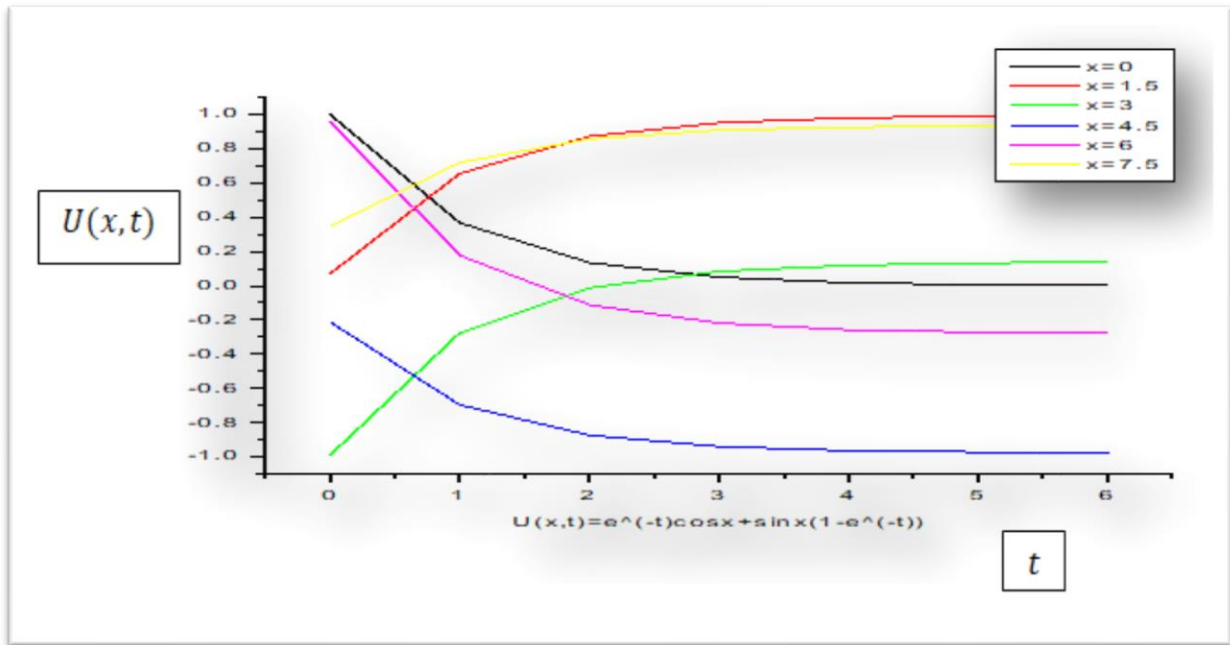


Figure 2.4. Graphical Interpretation of $U(x, t)$ for fixed x .

Discussion: By observing the numerical values in Table 2.4 and Figure 2.4, for fix values of x , the heat flow moves like a mixture of the exponential, sine and cosine wave and moving towards the cooldown situation as time passes.

Problem 2.3 Let us consider the heat equation

$$\frac{\partial U(x, t)}{\partial t} = \frac{\partial^2 U(x, t)}{\partial x^2} - 3U(x, t) + 3, \quad t > 0 \quad (2.13)$$

With conditions

$$U(0, t) = 1, \quad U(x, 0) = 1 + \sin x, \quad \frac{\partial U(0, t)}{\partial x} = e^{-4t} \quad (2.14)$$

Solution: Applying DNT on the equation (2.13) in both the sides, we get

$$\begin{aligned} \frac{p}{v} N_+^2\{U(x, t)\} - \frac{N_+^2\{U(x, 0)\}}{v} \\ = \frac{s^2}{u^2} N_+^2\{U(x, t)\} - \frac{s}{u^2} N_+^2\{U(0, t)\} - \frac{1}{u} N_+^2\left\{\frac{\partial U(0, t)}{\partial x}\right\} - 3N_+^2[U(x, t)] + 3 N_+^2[1] \end{aligned} \quad (2.15)$$

Also, by taking Natural transform on initial conditions (2.14), we get

$$N[U(0, t)] = \frac{1}{p}, \quad N[U(x, 0)] = \frac{1}{s} + \frac{u}{s^2 + u^2}, \quad N\left\{\frac{\partial u(0, t)}{\partial x}\right\} = \frac{1}{p + 4v} \quad (2.16)$$

from (2.15) and (2.16), we get

$$\left[\frac{p}{v} - \frac{s^2}{u^2} + 3\right] [N_+^2\{U(x, t)\}] = \frac{1}{sv} + \frac{u}{v(s^2 + u^2)} - \frac{1}{u^2 p} - \frac{1}{u(p + 4v)} + \frac{3}{sp} \quad (2.17)$$

$$[N_{\neq}^2\{U(x, t)\}] = \frac{1}{sp} + \frac{u}{(s^2 + u^2)} \cdot \frac{1}{(p + 4v)}$$

Now by taking inverse double natural transform on equation (2.17) we get

$$U(x, t) = 1 + e^{-4t} \sin x \tag{2.18}$$

which is the solution of given heat equation (2.13).

The graphs of the solution of the heat equation (2.13) are presented as Figure 2.5 and Figure 2.6, in which t and x were fixed one by one respectively to obtain the numerical results as shown in Table 2.5 and Table 2.6. The range of x and t are $0 \leq x \leq 7.5$ and $0 \leq t \leq 3$, respectively.

Table 2.5 Values of $U(x, t)$ for fixed t

Fix $t = 0$		Fix $t = 1$		Fix $t = 2$		Fix $t = 3$	
(x, t)	$U(x, t)$	(x, t)	$U(x, t)$	(x, t)	$U(x, t)$	(x, t)	$U(x, t)$
(0,0)	1	(0,1)	1	(0,2)	1	(0,3)	1
(0.5,0)	1.4794	(0.5,1)	1.0088	(0.5,2)	1.00016	(0.5,3)	1
(1,0)	1.8415	(1,1)	1.0154	(1,2)	1.0003	(1,3)	1
(1.5,0)	1.9975	(1.5,1)	1.0183	(1.5,2)	1.0003	(1.5,3)	1.00001
(2,0)	1.9093	(2,1)	1.0167	(2,2)	1.0003	(2,3)	1
(2.5,0)	1.5985	(2.5,1)	1.011	(2.5,2)	1.0002	(2.5,3)	1
(3,0)	1.1411	(3,1)	1.003	(3,2)	1.0005	(3,3)	1
(3.5,0)	.6492	(3.5,1)	.9936	(3.5,2)	.9999	(3.5,3)	1
(4,0)	.2432	(4,1)	.9861	(4,2)	.9997	(4,3)	1
(4.5,0)	.0225	(4.5,1)	.9821	(4.5,2)	.9997	(4.5,3)	1
(5,0)	.0411	(5,1)	.9824	(5,2)	.9997	(5,3)	1
(5.5,0)	.2945	(5.5,1)	.9871	(5.5,2)	.9998	(5.5,3)	1
(6,0)	.72058	(6,1)	.9949	(6,2)	.9999	(6,3)	1
(6.5,0)	1.2151	(6.5,1)	1.0039	(6.5,2)	1.00007	(6.5,3)	1
(7,0)	1.6569	(7,1)	1.0120	(7,2)	1.00022	(7,3)	1
(7.5,0)	1.938	(7.5,1)	1.0172	(7.5,2)	1.0003	(7.5,3)	1

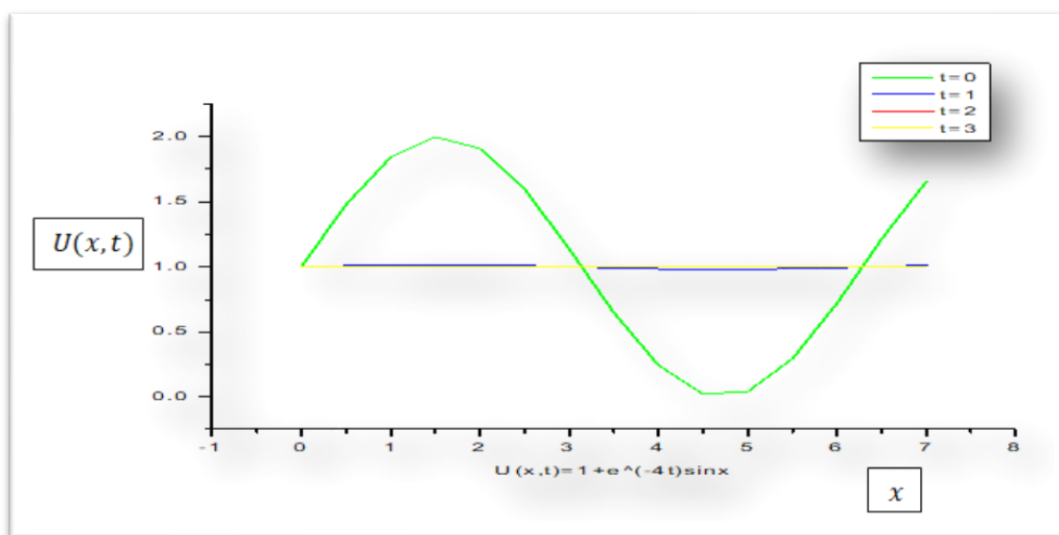


Figure 2.5: Graphical Interpretation of $U(x, t)$ for fixed t

Discussion: By observing the numerical values in Table 2.5 and Figure 2.5, for fix values of t , the heat flow moves like a sine wave and as the time passes, the amplitude of the waveform flow reduced gradually and moving towards a constant value.

Table 2.6 Values of $U(x, t)$ for fixed x

Fix $x = 0$		Fix $x = 1.5$		Fix $x = 3$		Fix $x = 4.5$		Fix $x = 6$		Fix $x = 7.5$	
(x, t)	$U(x, t)$	(x, t)	$U(x, t)$	(x, t)	$U(x, t)$	(x, t)	$U(x, t)$	(x, t)	$U(x, t)$	(x, t)	$U(x, t)$
(0,0)	1	(1.5,0)	1.9975	(3,0)	1.1411	(4.5,0)	.0225	(6,0)	.72058	(7.5,0)	1.938
(0,1)	1	(1.5,1)	1.0183	(3,1)	1.003	(4.5,1)	.9821	(6,1)	.9949	(7.5,1)	1.0172
(0,2)	1	(1.5,2)	1.0003	(3,2)	1.00005	(4.5,2)	.9997	(6,2)	.9999	(7.5,2)	1.0003
(0,3)	1	(1.5,3)	1.00001	(3,3)	1	(4.5,3)	.99999	(6,3)	1	(7.5,3)	1
(0,4)	1	(1.5,4)	1	(3,4)	1	(4.5,4)	.99998	(6,4)	1	(7.5,4)	1
(0,5)	1	(1.5,5)	1	(3,5)	1	(4.5,5)	1	(6,5)	1	(7.5,5)	1
(0,6)	1	(1.5,6)	1	(3,6)	1	(4.5,6)	1	(6,6)	1	(7.5,6)	1

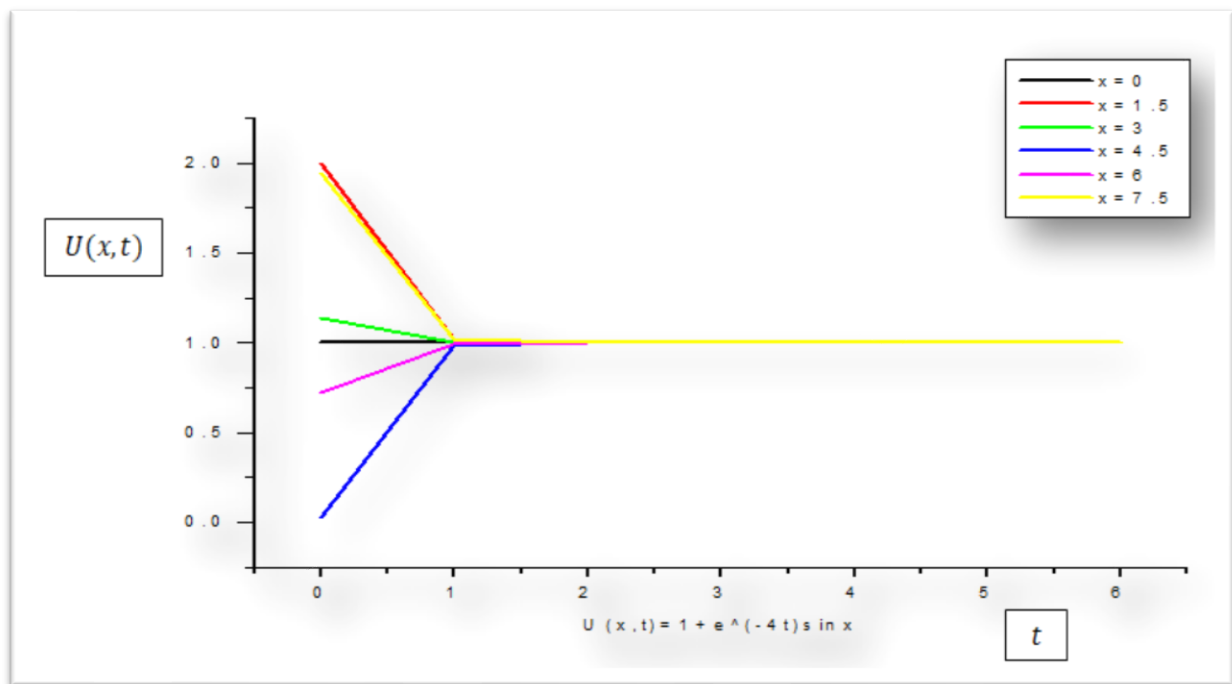


Figure 2.6. Graphical Interpretation of $U(x, t)$ for fix x .

Discussion: By observing the numerical values in Table 2.6 and Figure 2.6, for fix values of x , the heat flow moves like the exponential wave and moving towards a constant value.

2. CONCLUSION

In this work, the Double Natural transform was applied to find the solution of specific heat equations of one dimension under the boundary conditions. The results obtained are comparable with the results obtained from the literature with the help of double Laplace Transform and double Sumudu Transform (refer [6]). The nature of heat flow can be observed from Figures 2.1, 2.2, 2.3, 2.4 2.5 and 2.6 for the one-dimensional heat equations with different boundary conditions and for different value combinations of x and t which provides a deep thought of application in the relevant field.

REFERENCES

- [1] Al-Omari S K Q, On the application of natural transforms, *Inter. J. Pure Appl. Math.*, **85** (2013) 729–744.
- [2] Belgacem F B M & Silambarasan R, Advances in the natural transform, *AIP Conf. Proc.*, **1493** (2012) 106–110.
- [3] Belgacem F B M & Silambarasan R, Maxwell's equations solutions by means of the natural transform, *Int. J. Math. Eng. Sci. Aerosp.* **3** (2012) 313–323.
- [4] Belgacem F B M & Silambarasan R, Theory of natural transform, *Int. J. Math. Eng. Sci. Aerosp.* **3** (2012) 99–124.
- [5] Duffy D G, Transform methods for solving partial differential equations, second edition, Chapman & Hall/CRC, Boca Raton, FL, (2004).
- [6] Eshag M O, On double Laplace transform and double Sumudu transform, *American Journal of Engineering Research (AJER)* **6**, 312-317.
- [7] Estrin T A & Higgins T J, The solution of boundary value problems by multiple Laplace transformations, *J. Franklin Inst.* **252** (1951), 153–167. 1, 2.2, 2.5
- [8] Khan Z H & Khan W A, N-transform properties and applications. *NUST Jour. of Engg. Sciences.* **1**, 1 (2008)127-133.
- [9] Kilicman A & Eltayeb H, Some remarks on the Sumudu and Laplace transforms and applications to differential equations, *ISRN Appl. Math.*, (2012) 13 pages.
- [10] Mana A. K & Omranb M, On double Natural transform and its applications, *J. Nonlinear Sci. Appl.* **10** (2017) 1744–1754
- [11] Sneddon I N, The use of integral transforms, McGraw-Hill, New York, (1972). 1.2
- [12] Tchuenche J M & Mbare N S, An application of the double Sumudu transform, *Appl. Math. Sci. (Ruse)*, **1** (2007) 31–39, 1.4
- [13] Watugala G K, The Sumudu transform for functions of two variables, *Math. Engg. Indust.* **8** (2002) 293–302. 1.3